


# SF MULTICLOSER INSULATED CAVITY CLOSER

<https://quantumprofilesystems.com/en/brands/dacatie/designproduct/sf-multicloser-insulated-cavity-closer/>

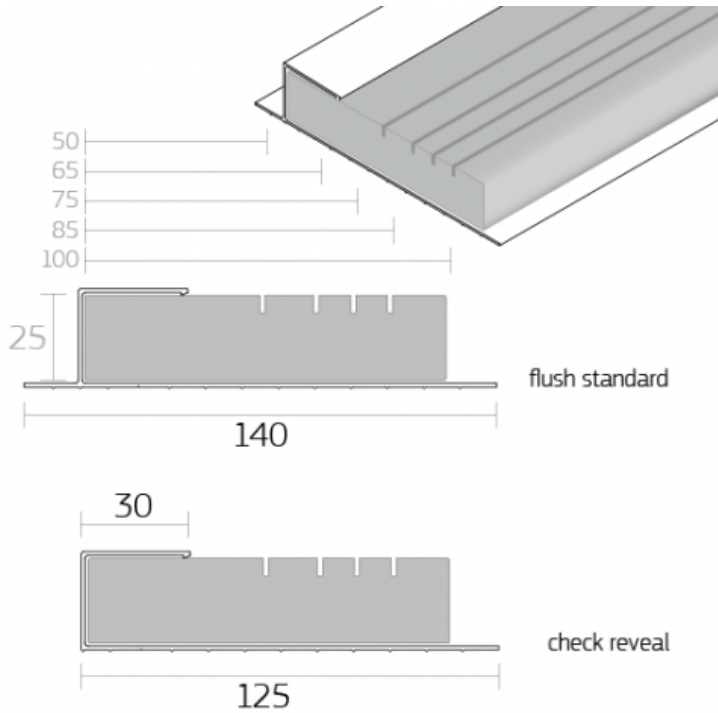

Click here to [request a sample](#).

## SPECIFICATIONS

Fire Rated	No
Check Reveal	Yes
Available	
Frame Former	No
Profile	
1st fix	No
2nd fix	Yes
Minimum Cavity width	50
Maximum Cavity width	100
Lengths	2.4M
Additional Key Features	/ Economic and versatile on site (easily trimmed) / One profile suits 5 cavity widths - insulation trimmed on site / Complies with new Part L Building

Regulations / Accepts all window and door frame material / XPS Insulation is zero rated for ozone depletion potential (ODP) /

A very versatile and economic uPVC insulated closer for cavity widths between 50 and 100mm. Second fix applications: Insulation is trimmed on site to suit cavity width. Please note: Insulation colour may vary